
KerioControl AI NG120

HARDWARE APPLIANCE DATASHEET

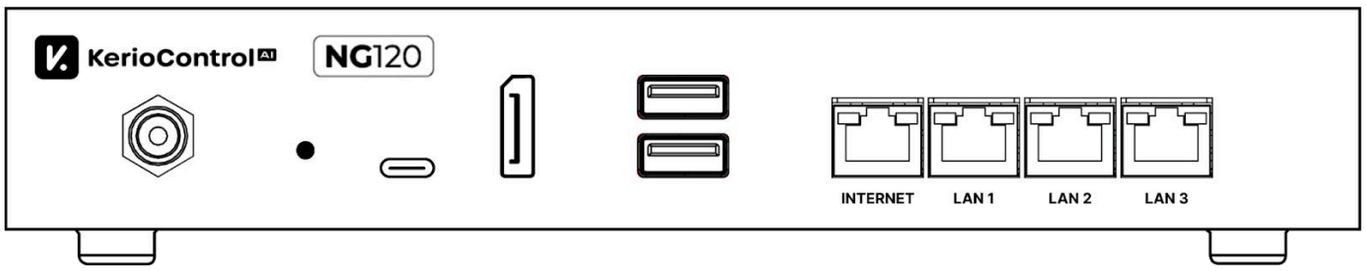

Performance & Capacity

Feature	Specification
Number of users	10 - 20
Number of Devices	50 - 100
Concurrent Connections	3,000 - 4,000
Throughput Firewall	900 Mbps
Throughput UTM	460 Mbps
Supported Versions	v10 and later

System Specifications

Component	Specification
Processor	Intel(R) Atom(TM) x7211RE
Memory	8GB RAM
Storage	SSD 256GB M.2
Security	TPM 2.0 onboard

Global Scope

Official GFI Partner

Global Scope Technologies | Doha, Qatar

+97444151151

sales@globalscope.qa

https://globalscope.qa

Network Interfaces

Interface	Specification
LAN Ports	4 x 2.5GbE RJ45 ports
Console	1 x RJ45 console port

I/O Interfaces

Interface	Specification
USB	2 x USB 3.2, Type A
System Control	Power/Reset button
LED Indicators	LAN/MGMT/SYS/SSD/PWR

Physical Specifications

Feature	Specification
Dimensions	165 x 134.5 x 34 mm (6.5” x 5.3” x 1.3”)
Weight	0.715 kg (1.57 lb)
Design	Fanless desktop form factor

Power

Feature	Specification
Power Supply	36W 12V DC-in power adapter
Input	100-240V AC, 50-60 Hz

Global Scope
Official GFI Partner
Global Scope Technologies | Doha, Qatar
+97444151151
sales@globalscope.qa
https://globalscope.qa

Environmental

Feature	Specification
Operating Temperature	0°C to 40°C (32°F to 104°F)
Storage Temperature	-20°C to 80°C (-4°F to 176°F)
Relative Humidity	10% to 90% non-condensing

Certifications

CE

FCC Class B

Package Contents

- NG120 Hardware Appliance.
- 36W 12V DC-in power adapter.
- Quick Start Guide.
- Ethernet Cable.